

# EXAMPLE ONLY OF ONE MANUFACTURER



Buy it for looks. Buy it for life.®

*There is more than 1 version of this model.  
Page down to identify the version you have.*

## FAUCET DESCRIPTION

- High arc spout provides height and reach to fill or clean large pots while the pull out wand provides the maneuverability for cleaning or rinsing
- Optimized cleaning force with PowerClean™
- Reflex® system offers smooth operation, easy movement, self retraction, and secure docking
- Metal construction with various finishes identified by suffix
- Duralock™ quick connect installation
- Pulldown spray with 68" braided hose
- Flexible supply lines with 3/8" compression fittings connect directly to supply stop

## OPERATION

- Lever style handle
- Spout rotation is 120°
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pullout or retracted position

## FLOW

- Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi max
- Operates in eco-performance mode by default in aerated and spray stream

## CARTRIDGE

- 1255™ Duralast™ cartridge for Single-Handle Faucets
- Engineered polymers, non-ferrous and stainless steel materials

**Michigan Plumbing Code  
Referenced Standards**

## STANDARDS

- Third party certified to IAPMO Green, **ASME A112.18.1/CSA B125.1** and all applicable requirements therein including NSF 61 & 372
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- **The backflow protection system in this device consists of two independently operating check valves, a primary and a secondary which prevent backflow**
- ADA ♿ for lever handle

## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit [www.moen.com/support](http://www.moen.com/support) for complete details and limitations


# Specifications



**Camerist®  
Single-Handle Kitchen  
Pull Out Faucet**

**Models:** 7545 series  
67545 series

**NOTE:** THIS FAUCET IS DESIGNED  
TO BE INSTALLED THROUGH 1 OR  
3 HOLE, 1-1/2" (38MM) DIA.

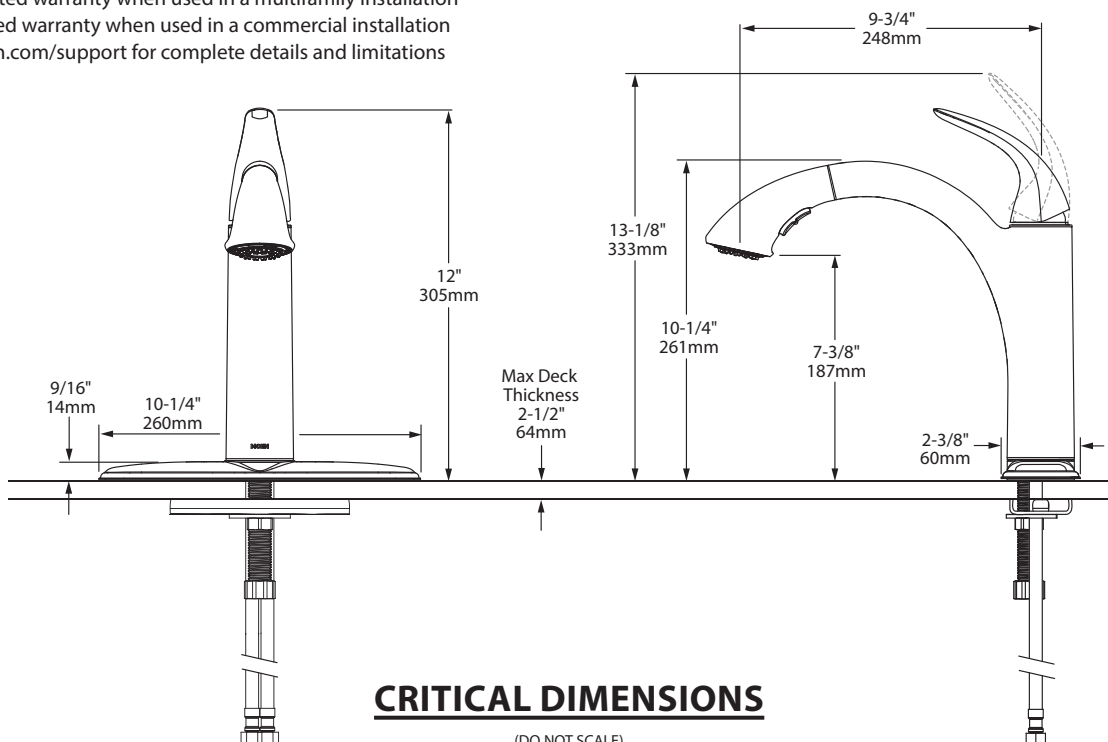



Buy it for looks. Buy it for life.®

# Specifications

## FAUCET DESCRIPTION

- Metal construction with various finishes identified by suffix
- Quick connect installation
- Pullout spray with 59" braided hose
- Flexible supplies with 3/8" compression fittings

## OPERATION

- Lever style handle
- Temperature controlled by 100° arc of handle travel
- Spout receptor rotation is 120°
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pullout or retracted position

## FLOW

- Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi

## CARTRIDGE

- 1255™ Duralast™ cartridge

**Michigan Plumbing Code  
Referenced Standards**


## STANDARDS

- Third party certified to IAPMO Green, **ASME A112.18.1/CSA B125.1**, NSF 61/9 and all applicable requirements referenced therein
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water
- ADA ♿ for lever handle
- **The backflow protection system in this device consists of two independently operating check valves, a primary and a secondary which prevent backflow**

## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit [www.moen.com/support](http://www.moen.com/support) for complete details and limitations



## Camerist® Single-Handle Kitchen Pull Out Faucet

**Models:** 7545 series  
67545 series

**NOTE:** THIS FAUCET IS DESIGNED  
TO BE INSTALLED THROUGH 1 OR  
3 HOLE, 1-1/2" (38MM) DIA.

**GREEN**

